

# Sunon

---

## AC Axial Fan



Fan and Blower

**SUNON®**

*Your Local Authorized Distributor:*

*Hardware Specialty Co., Inc.*

*[www.hardware specialty.com](http://www.hardware specialty.com)*

## >> AC Axial Fans

## AC Axial Fans


|    |   |                                                                                                         |
|----|---|---------------------------------------------------------------------------------------------------------|
| 02 | ◇ | Engineering Information                                                                                 |
| 03 | ◇ | Model Numbering System                                                                                  |
| 04 | ◇ | 80x80x25mm                                                                                              |
| 05 | ◇ | 80x80x38mm                                                                                              |
| 06 | ◇ | 92x92x25mm                                                                                              |
| 07 | ◇ | 120x120x25mm                                                                                            |
| 08 | ◇ | 120x120x31mm(Blower)  |
| 09 | ◇ | 120x120x38mm                                                                                            |
| 10 | ◇ | 120x120x38mm(High Air Flow)                                                                             |
| 11 | ◇ | 120x120x38mm(Plastic Frame)                                                                             |
| 12 | ◇ | 120x120x38mm(Dual AC Voltage-Plastic Frame)                                                             |
| 13 | ◇ | 120x120x38mm(Dual AC Voltage)                                                                           |
| 14 | ◇ | 120x38mm (Skeleton AC Fan)                                                                              |
| 15 | ◇ | 172x151x51mm                                                                                            |
| 16 | ◇ | φ172x51mm                                                                                               |
| 17 | ◇ | 176x176x89mm         |
| 18 | ◇ | φ254x89mm                                                                                               |
| 19 | ◇ | Accessories                                                                                             |



*Alveolate Motor AC fan series with automatic motor-wire wrapping technology ensures stable performance of high wind volume, low acoustic noise, also available with functions of dual spinning rate, and thermal cutout.*




## SUNON-Alveolate Motor VS. Traditional Shaded-Pole Motor

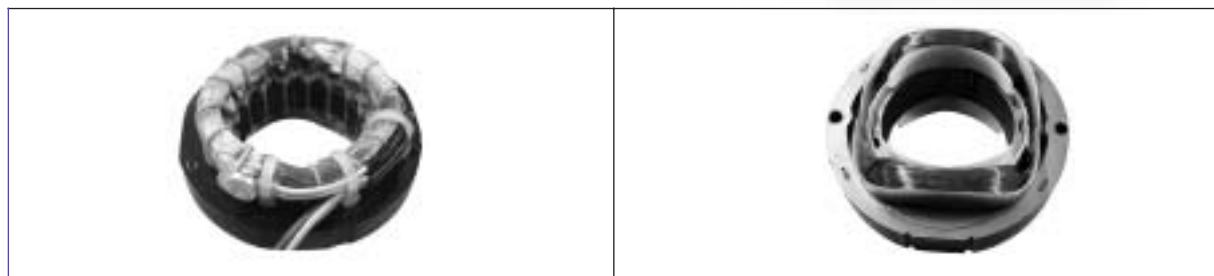


| SUNON-Alveolate Motor                                                                                                                                                                                                                     | Traditional Shaded-Pole Motor                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. The Alveolate Motor is equipped with starting stator coils and working ones. The starting coils form a low starting voltage with the capacitors. For example, an 115VAC (the fixed voltage) Alveolate Motor can be started with 60VAC. | 1. The Traditional Shaded-Pole Motor, designed with single-wire wrapping, is started by "the starting copper" and cannot be started with low voltage. An 115VAC Traditional Shaded-Pole motor will need more than 80VAC to run, 20VAC more than the Alveolate one. |
| 2. The coils do not produce high temperature and consumes less electricity. The temperature is normally around 50°C. Therefore, the motor is always stable and reliable.                                                                  | 2. The Traditional Shaded-Pole Motor consumes electricity twice as much as the Alveolate Motor. It is not reliable because the temperature is usually higher than 70°C.                                                                                            |
| 3. The Thermal Cutout can protect the motor.                                                                                                                                                                                              | 3. The Thermal Cutout is an option.                                                                                                                                                                                                                                |
| 4. The motor has a large torsion to produce high wind pressure and wind volume.                                                                                                                                                           | 4. General wind pressure and wind volume.                                                                                                                                                                                                                          |
| 5. The motor is equipped with the third wire, ready to comply with the customer's systems.                                                                                                                                                | 5. Without the third wire.                                                                                                                                                                                                                                         |

# MODEL NUMBERING SYSTEM

## General AC Fan

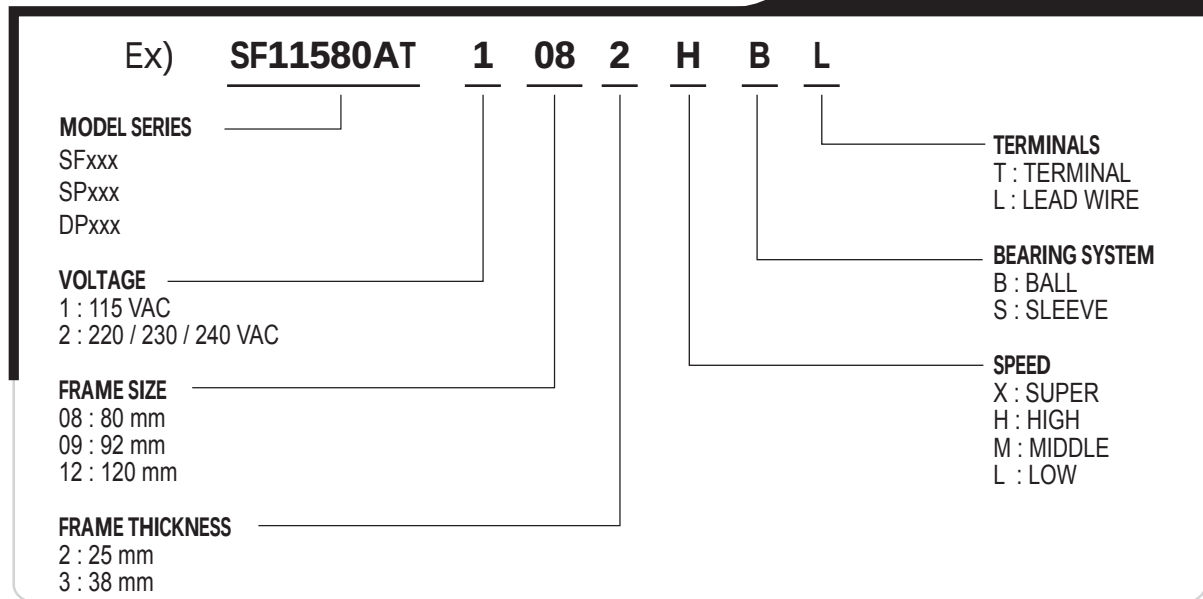

## New Type AC Fan

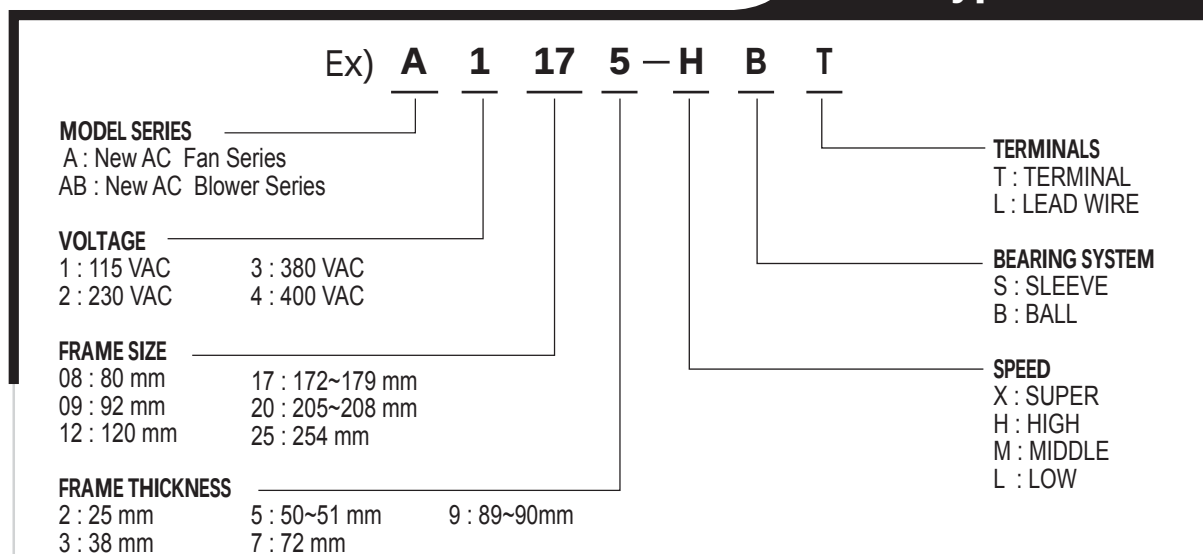

### P/N

P/N Suffixes have the following significance :



- T : Thermal Cutout
- C : Capacitor
- TC : Alveolate Motor with Thermal Cutout and Capacitor
- R : Round Frame (Blank : Standard Frame)

\* Alveolate Motor only available in P/N : TC model

# 80x80x25 mm

Bearing Type :Ball / Sleeve bearing

Air Flow:17-22CFM

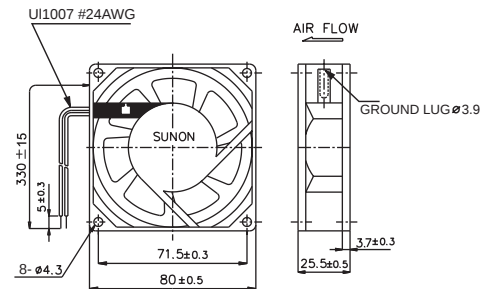
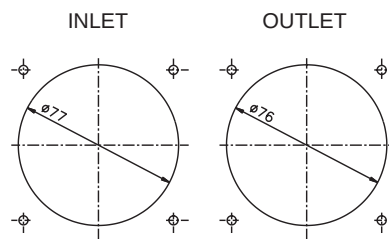


## AC Series

| Model     | P/N     | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-HzO) | Noise<br>(dBA) | Weight<br>(g) |
|-----------|---------|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|----------------------------------|----------------|---------------|
| SF11580AT | 1082HSL | ⊙                             | 115                        | 50/60         | 0.12/0.10                 | 12/11                           | 2300/2750      | 17/21                | 0.12/0.18                        | 29/33          | 260           |
| SF11580AT | 1082HBL | ○                             | 115                        | 50/60         | 0.12/0.10                 | 12/11                           | 2450/2900      | 18/22                | 0.13/0.19                        | 30/34.5        | 260           |
| SF23080AT | 2082HSL | ⊙                             | 220/240                    | 50/60         | 0.07/0.07                 | 14/13.5                         | 2300/2750      | 17/21                | 0.12/0.18                        | 29/33          | 260           |
| SF23080AT | 2082HBL | ○                             | 220/240                    | 50/60         | 0.07/0.07                 | 14/13.5                         | 2450/2900      | 18/22                | 0.13/0.19                        | 30/34.5        | 260           |

Frame : Aluminum alloy




Specifications subject to change without notice

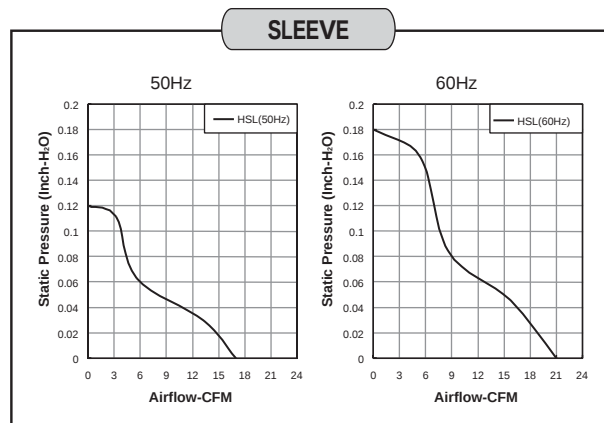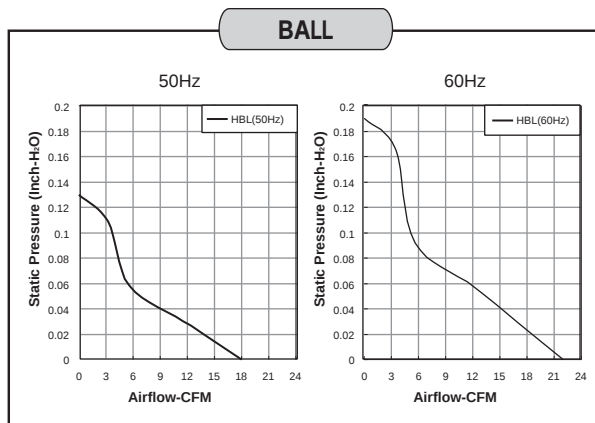

# 80x80x38 mm

Bearing Type :Ball / Sleeve bearing

Air Flow:23-31CFM

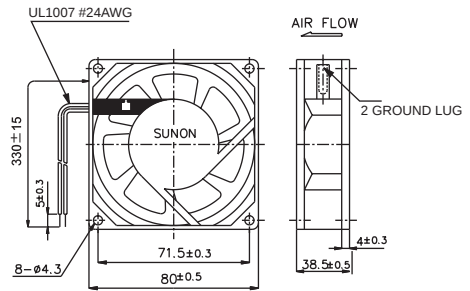



## AC Series

| Model    | P/N     | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|----------|---------|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| SF11580A | 1083HSL | ⊙                             | 115                        | 50/60         | 0.15/0.13                 | 14/12                           | 2300/2750      | 23/30                | 0.12/0.18                                     | 31/35          | 340           |
| SF11580A | 1083HBL | ○                             | 115                        | 50/60         | 0.15/0.13                 | 14/12                           | 2400/2850      | 24/31                | 0.13/0.19                                     | 32/36.5        | 340           |
| SF23080A | 2083HSL | ⊙                             | 220/240                    | 50/60         | 0.07/0.06                 | 14/13.5                         | 2300/2750      | 23/30                | 0.12/0.18                                     | 31/35          | 340           |
| SF23080A | 2083HBL | ○                             | 220/240                    | 50/60         | 0.07/0.06                 | 14/13.5                         | 2400/2850      | 24/31                | 0.13/0.19                                     | 32/36.5        | 340           |

Frame : Aluminum alloy


Specifications subject to change without notice

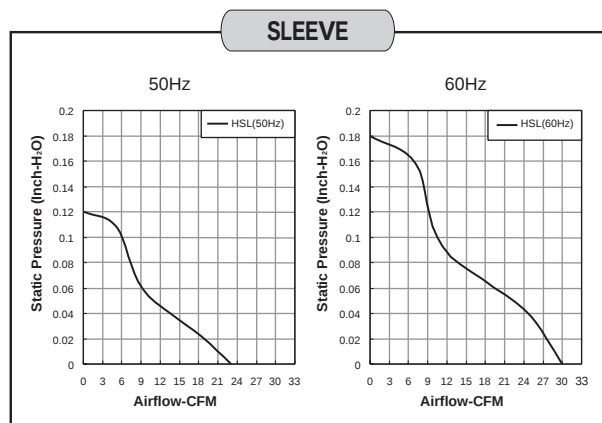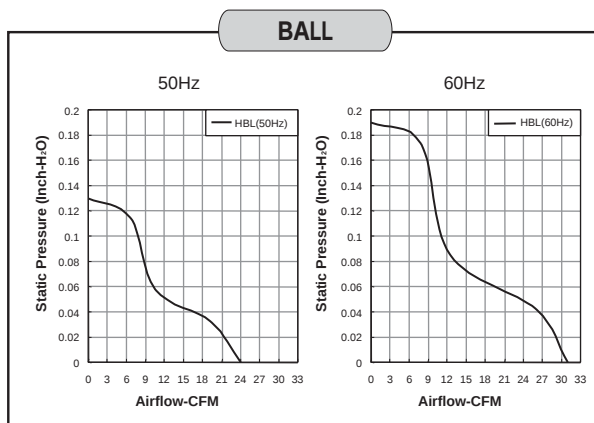

# 92x92x25 mm

Bearing Type :Ball / Sleeve bearing

Air Flow:21-37CFM


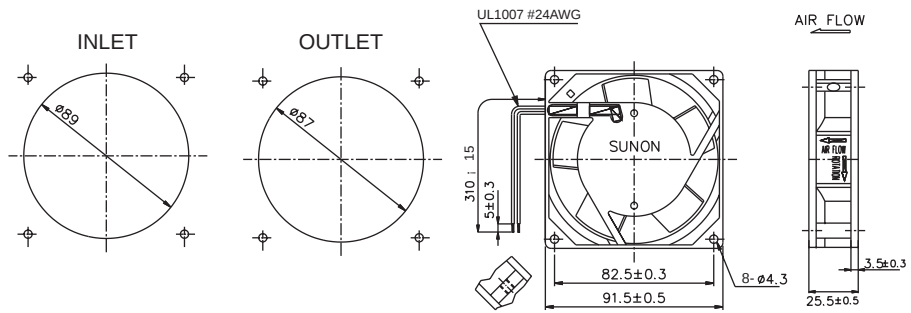


## AC Series

| Model    | P/N     | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|----------|---------|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| SF11592A | 1092HSL | ⊙                             | 115                        | 50/60         | 0.12/0.11                 | 13.0/12                         | 2250/2750      | 29/36                | 0.12/0.18                                     | 36/39          | 280           |
| SF11592A | 1092HST | ⊙                             | 115                        | 50/60         | 0.12/0.11                 | 13.0/12                         | 2250/2750      | 29/36                | 0.12/0.18                                     | 36/39          | 280           |
| SF11592A | 1092MSL | ⊙                             | 115                        | 50/60         | 0.06/0.06                 | 7.0/6.0                         | 1550/1700      | 21/26                | 0.08/0.09                                     | 28/30          | 280           |
| SF11592A | 1092MST | ⊙                             | 115                        | 50/60         | 0.06/0.06                 | 7.0/6.0                         | 1550/1700      | 21/26                | 0.08/0.09                                     | 28/30          | 280           |
| SF11592A | 1092HBL | ○                             | 115                        | 50/60         | 0.12/0.11                 | 13.0/12                         | 2350/2850      | 30/37                | 0.13/0.19                                     | 37/40          | 280           |
| SF11592A | 1092HBT | ○                             | 115                        | 50/60         | 0.12/0.11                 | 13.0/12                         | 2350/2850      | 30/37                | 0.13/0.19                                     | 37/40          | 280           |
| SF11592A | 1092MBL | ○                             | 115                        | 50/60         | 0.07/0.06                 | 7.0/6.0                         | 1800/2100      | 23/28                | 0.10/0.11                                     | 31/33          | 280           |
| SF11592A | 1092MBT | ○                             | 115                        | 50/60         | 0.07/0.06                 | 7.0/6.0                         | 1800/2100      | 23/28                | 0.10/0.11                                     | 31/33          | 280           |
| SF23092A | 2092HSL | ⊙                             | 220/240                    | 50/60         | 0.07/0.06                 | 14.5/14                         | 2250/2750      | 29/36                | 0.12/0.18                                     | 36/39          | 280           |
| SF23092A | 2092HST | ⊙                             | 220/240                    | 50/60         | 0.07/0.06                 | 14.5/14                         | 2250/2750      | 29/36                | 0.12/0.18                                     | 36/39          | 280           |
| SF23092A | 2092MSL | ⊙                             | 220/240                    | 50/60         | 0.07/0.07                 | 15.0/14                         | 2000/2500      | 27/33                | 0.11/0.16                                     | 32/37          | 280           |
| SF23092A | 2092MST | ⊙                             | 220/240                    | 50/60         | 0.07/0.07                 | 15.0/14                         | 2000/2500      | 27/33                | 0.11/0.16                                     | 32/37          | 280           |
| SF23092A | 2092HBL | ○                             | 220/240                    | 50/60         | 0.07/0.06                 | 14.5/14                         | 2350/2850      | 30/37                | 0.13/0.19                                     | 37/40          | 280           |
| SF23092A | 2092HBT | ○                             | 220/240                    | 50/60         | 0.07/0.06                 | 14.5/14                         | 2350/2850      | 30/37                | 0.13/0.19                                     | 37/40          | 280           |
| SF23092A | 2092MBL | ○                             | 220/240                    | 50/60         | 0.07/0.07                 | 15.0/14                         | 2200/2700      | 28/35                | 0.12/0.18                                     | 35/38          | 280           |
| SF23092A | 2092MBT | ○                             | 220/240                    | 50/60         | 0.07/0.07                 | 15.0/14                         | 2200/2700      | 28/35                | 0.12/0.18                                     | 35/38          | 280           |


Frame : Aluminum alloy

Specifications subject to change without notice

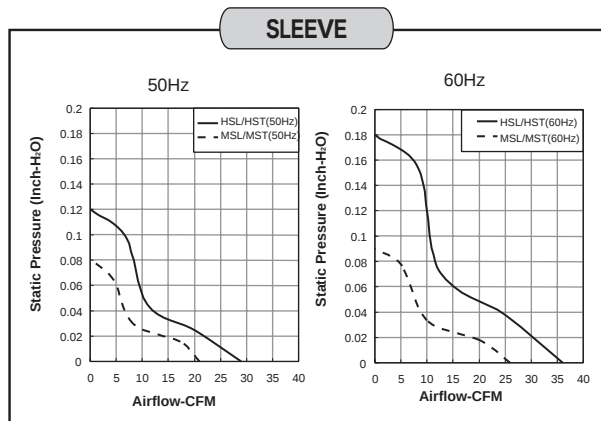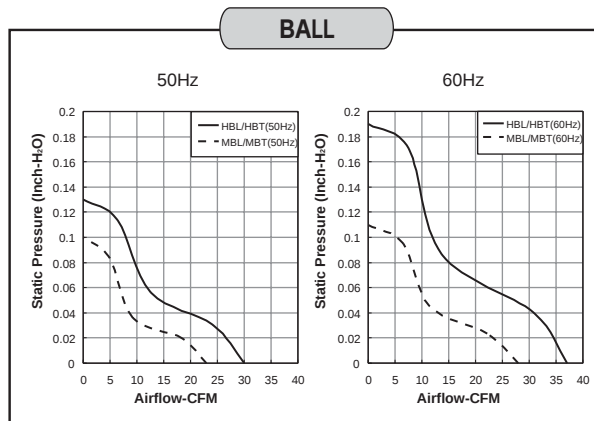

# 120x120x25 mm

Bearing Type :Ball / Sleeve bearing  
Air Flow:46-78CFM


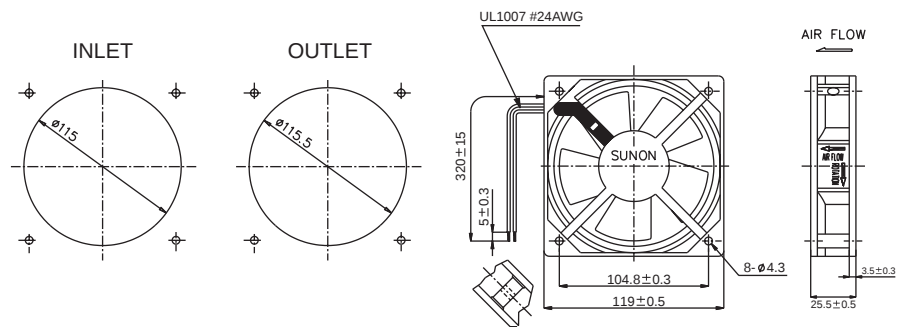


## AC Series

| Model   | P/N     | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|---------|---------|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| SP101AT | 1122HSL | ⊙                             | 115                        | 50/60         | 0.19/0.18                 | 19/18                           | 2000/2200      | 64/77                | 0.13/0.15                                     | 43/45          | 330           |
| SP101AT | 1122HST | ⊙                             | 115                        | 50/60         | 0.19/0.18                 | 19/18                           | 2000/2200      | 64/77                | 0.13/0.15                                     | 43/45          | 330           |
| SP102AT | 1122MSL | ⊙                             | 115                        | 50/60         | 0.13/0.12                 | 14/13                           | 1900/2000      | 54/64                | 0.13/0.13                                     | 42/43          | 330           |
| SP102AT | 1122MST | ⊙                             | 115                        | 50/60         | 0.13/0.12                 | 14/13                           | 1900/2000      | 54/64                | 0.13/0.13                                     | 42/43          | 330           |
| SP103AT | 1122LSL | ⊙                             | 115                        | 50/60         | 0.14/0.13                 | 14/13                           | 1600/1800      | 46/53                | 0.11/0.12                                     | 35/38          | 330           |
| SP103AT | 1122LST | ⊙                             | 115                        | 50/60         | 0.14/0.13                 | 14/13                           | 1600/1800      | 46/53                | 0.11/0.12                                     | 35/38          | 330           |
| SP101AT | 1122HBL | ○                             | 115                        | 50/60         | 0.19/0.18                 | 19/18                           | 2150/2300      | 66/78                | 0.14/0.16                                     | 44/46          | 330           |
| SP101AT | 1122HBT | ○                             | 115                        | 50/60         | 0.19/0.18                 | 19/18                           | 2150/2300      | 66/78                | 0.14/0.16                                     | 44/46          | 330           |
| SP102AT | 1122MBL | ○                             | 115                        | 50/60         | 0.13/0.12                 | 14/13                           | 1900/2100      | 54/64                | 0.13/0.14                                     | 40/44          | 330           |
| SP102AT | 1122MBT | ○                             | 115                        | 50/60         | 0.13/0.12                 | 14/13                           | 1900/2100      | 54/65                | 0.13/0.14                                     | 40/44          | 330           |
| SP103AT | 1122LBL | ○                             | 115                        | 50/60         | 0.14/0.13                 | 14/13                           | 1700/1900      | 47/54                | 0.12/0.13                                     | 37/40          | 330           |
| SP103AT | 1122LBT | ○                             | 115                        | 50/60         | 0.14/0.13                 | 14/13                           | 1700/1900      | 47/54                | 0.12/0.13                                     | 37/40          | 330           |
| DP201AT | 2122HSL | ⊙                             | 220/240                    | 50/60         | 0.09/0.09                 | 19/18                           | 2000/2200      | 64/77                | 0.13/0.15                                     | 43/45          | 330           |
| DP201AT | 2122HST | ⊙                             | 220/240                    | 50/60         | 0.09/0.09                 | 19/18                           | 2000/2200      | 64/77                | 0.13/0.15                                     | 43/45          | 330           |
| DP202AT | 2122MSL | ⊙                             | 220/240                    | 50/60         | 0.07/0.07                 | 15/14                           | 1900/2100      | 54/65                | 0.13/0.14                                     | 42/44          | 330           |
| DP202AT | 2122MST | ⊙                             | 220/240                    | 50/60         | 0.07/0.07                 | 15/14                           | 1900/2100      | 54/65                | 0.13/0.14                                     | 42/44          | 330           |
| DP203AT | 2122LSL | ⊙                             | 220/240                    | 50/60         | 0.07/0.07                 | 14/13                           | 1600/1800      | 46/53                | 0.11/0.12                                     | 35/38          | 330           |
| DP203AT | 2122LST | ⊙                             | 220/240                    | 50/60         | 0.07/0.07                 | 14/13                           | 1600/1800      | 46/53                | 0.11/0.12                                     | 35/38          | 330           |
| DP201AT | 2122HBL | ○                             | 220/240                    | 50/60         | 0.09/0.09                 | 19/18                           | 2150/2300      | 66/78                | 0.14/0.16                                     | 44/46          | 330           |
| DP201AT | 2122HBT | ○                             | 220/240                    | 50/60         | 0.09/0.09                 | 19/18                           | 2150/2300      | 66/78                | 0.14/0.16                                     | 44/46          | 330           |
| DP202AT | 2122MBL | ○                             | 220/240                    | 50/60         | 0.07/0.07                 | 15/14                           | 1900/2200      | 54/77                | 0.13/0.15                                     | 40/45          | 330           |
| DP202AT | 2122MBT | ○                             | 220/240                    | 50/60         | 0.07/0.07                 | 15/14                           | 1900/2200      | 54/77                | 0.13/0.15                                     | 40/45          | 330           |
| DP203AT | 2122LBL | ○                             | 220/240                    | 50/60         | 0.07/0.07                 | 14/13                           | 1700/1900      | 47/54                | 0.12/0.13                                     | 37/40          | 330           |
| DP203AT | 2122LBT | ○                             | 220/240                    | 50/60         | 0.07/0.07                 | 14/13                           | 1700/1900      | 47/54                | 0.12/0.13                                     | 37/40          | 330           |

Frame : Aluminum alloy

Specifications subject to change without notice

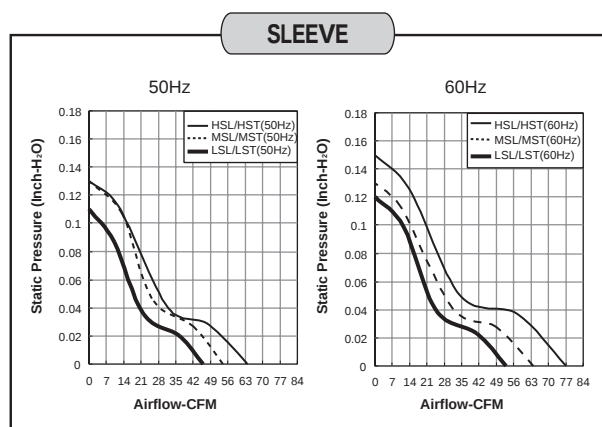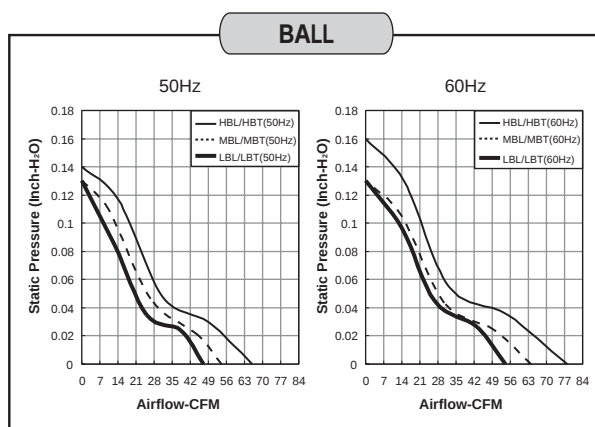

Sunon AC Series 07

Your Local Authorized Distributor:

Hardware Specialty Co., Inc.

[www.hardware-specialty.com](http://www.hardware-specialty.com)


# 120x120x31 mm ( Blower )

Bearing Type : Sleeve bearing

Air Flow:20-22 CFM




AC Series

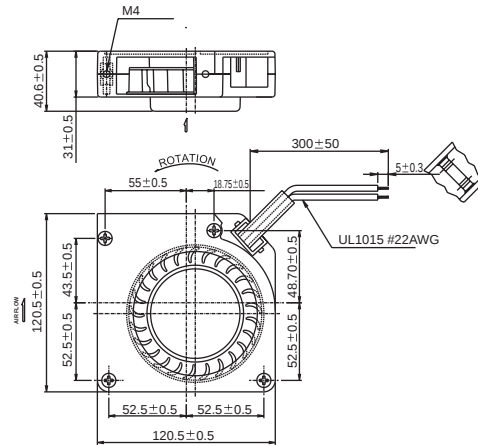

| Model      | P/N | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|------------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| AB1123-HST |     | ⊙                             | 115                        | 50/60         | 0.25/0.21                 | 19/17                           | 2600/2850      | 20/22                | 0.34/0.5                                      | 48/50          | 657           |
| AB1123-HSL |     | ⊙                             | 115                        | 50/60         | 0.25/0.21                 | 19/17                           | 2600/2850      | 20/22                | 0.34/0.5                                      | 48/50          | 657           |

Frame : Aluminum alloy

Specifications subject to change without notice

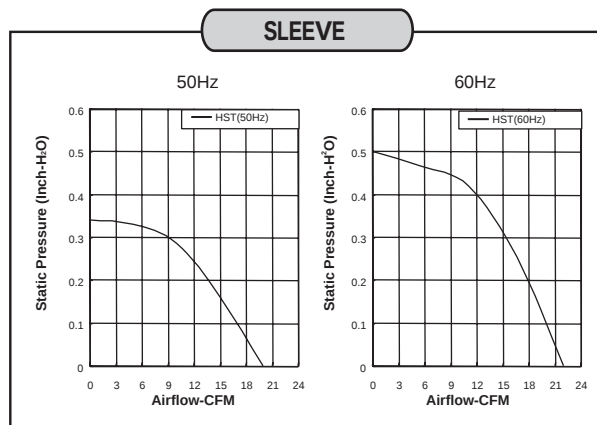

Sunon AC Series 08




Your Local Authorized Distributor:

Hardware Specialty Co., Inc.

[www.hardware-specialty.com](http://www.hardware-specialty.com)

# 120x120x38 mm

Bearing Type :Ball / Sleeve bearing  
Air Flow:70-117CFM

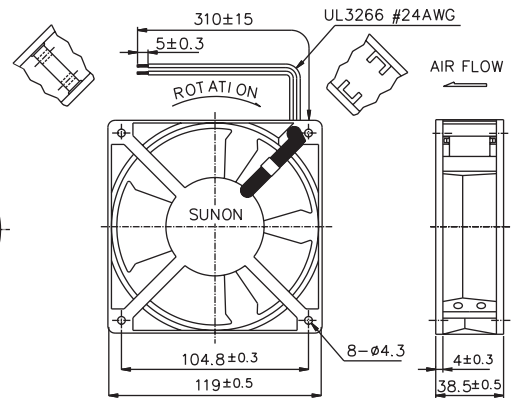



## AC Series

| Model  | P/N     | Bearing<br>○ SLEEVE<br>● BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|--------|---------|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| SP100A | 1123XSL | ●                             | 115                        | 50/60         | 0.26/0.24                 | 22/20                           | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |
| SP100A | 1123XST | ●                             | 115                        | 50/60         | 0.26/0.24                 | 22/20                           | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |
| SP101A | 1123HSL | ●                             | 115                        | 50/60         | 0.21/0.18                 | 20/18                           | 2550/2900      | 85/105               | 0.25/0.30                                     | 43/48          | 550           |
| SP101A | 1123HST | ●                             | 115                        | 50/60         | 0.21/0.18                 | 20/18                           | 2550/2900      | 85/105               | 0.25/0.30                                     | 43/48          | 550           |
| SP102A | 1123MSL | ●                             | 115                        | 50/60         | 0.17/0.16                 | 15/15                           | 2400/2600      | 78/84                | 0.14/0.21                                     | 33/38          | 543           |
| SP102A | 1123MST | ●                             | 115                        | 50/60         | 0.17/0.16                 | 15/15                           | 2400/2600      | 78/84                | 0.14/0.21                                     | 33/38          | 543           |
| SP103A | 1123LSL | ●                             | 115                        | 50/60         | 0.13/0.11                 | 11/11                           | 2000/2200      | 70/76                | 0.08/0.12                                     | 36/38          | 550           |
| SP103A | 1123LST | ●                             | 115                        | 50/60         | 0.13/0.11                 | 11/11                           | 2000/2200      | 70/76                | 0.08/0.12                                     | 36/38          | 550           |
| SP100A | 1123XBL | ○                             | 115                        | 50/60         | 0.26/0.24                 | 22/20                           | 2850/3150      | 97/117               | 0.34/0.39                                     | 45/50          | 550           |
| SP100A | 1123XBT | ○                             | 115                        | 50/60         | 0.26/0.24                 | 22/20                           | 2850/3150      | 97/117               | 0.34/0.39                                     | 45/50          | 550           |
| SP101A | 1123HBL | ○                             | 115                        | 50/60         | 0.21/0.18                 | 20/18                           | 2750/3050      | 87/107               | 0.26/0.32                                     | 45/50          | 550           |
| SP101A | 1123HBT | ○                             | 115                        | 50/60         | 0.21/0.18                 | 20/18                           | 2750/3050      | 87/107               | 0.26/0.32                                     | 45/50          | 550           |
| SP102A | 1123MBL | ○                             | 115                        | 50/60         | 0.17/0.16                 | 16/15                           | 2500/2700      | 80/88                | 0.15/0.22                                     | 35/40          | 550           |
| SP102A | 1123MBT | ○                             | 115                        | 50/60         | 0.17/0.16                 | 16/15                           | 2500/2700      | 80/88                | 0.15/0.22                                     | 35/40          | 550           |
| SP103A | 1123LBL | ○                             | 115                        | 50/60         | 0.13/0.11                 | 11/11                           | 2150/2300      | 72/78                | 0.09/0.13                                     | 37/39          | 550           |
| SP103A | 1123LBT | ○                             | 115                        | 50/60         | 0.13/0.11                 | 11/11                           | 2150/2300      | 72/78                | 0.09/0.13                                     | 37/39          | 550           |
| DP200A | 2123XSL | ●                             | 220/240                    | 50/60         | 0.14/0.12                 | 22/21                           | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 543           |
| DP200A | 2123XST | ●                             | 220/240                    | 50/60         | 0.14/0.12                 | 22/21                           | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 543           |
| DP201A | 2123HSL | ●                             | 220/240                    | 50/60         | 0.125/0.11                | 20/19                           | 2550/2900      | 85/105               | 0.25/0.30                                     | 43/48          | 550           |
| DP201A | 2123HST | ●                             | 220/240                    | 50/60         | 0.125/0.11                | 20/19                           | 2550/2900      | 85/105               | 0.25/0.30                                     | 43/48          | 550           |
| DP202A | 2123MSL | ●                             | 220/240                    | 50/60         | 0.09/0.08                 | 16/15                           | 2300/2500      | 78/84                | 0.14/0.21                                     | 33/38          | 543           |
| DP202A | 2123MST | ●                             | 220/240                    | 50/60         | 0.09/0.08                 | 16/15                           | 2300/2500      | 78/84                | 0.14/0.21                                     | 33/38          | 543           |
| DP203A | 2123LSL | ●                             | 220/240                    | 50/60         | 0.06/0.05                 | 11/10                           | 2000/1800      | 70/63                | 0.08/0.07                                     | 36/32          | 550           |
| DP203A | 2123LST | ●                             | 220/240                    | 50/60         | 0.06/0.05                 | 11/10                           | 2000/1800      | 70/63                | 0.08/0.07                                     | 36/32          | 550           |
| DP200A | 2123XBL | ○                             | 220/240                    | 50/60         | 0.14/0.12                 | 22/21                           | 2850/3150      | 97/117               | 0.34/0.39                                     | 45/50          | 550           |
| DP200A | 2123XBT | ○                             | 220/240                    | 50/60         | 0.14/0.12                 | 22/21                           | 2850/3150      | 97/117               | 0.34/0.39                                     | 45/50          | 550           |
| DP201A | 2123HBL | ○                             | 220/240                    | 50/60         | 0.125/0.11                | 20/19                           | 2750/3050      | 87/107               | 0.26/0.32                                     | 45/50          | 550           |
| DP201A | 2123HBT | ○                             | 220/240                    | 50/60         | 0.125/0.11                | 20/19                           | 2750/3050      | 87/107               | 0.26/0.32                                     | 45/50          | 550           |
| DP202A | 2123MBL | ○                             | 220/240                    | 50/60         | 0.09/0.08                 | 16/15                           | 2400/2600      | 78/84                | 0.14/0.21                                     | 34/39          | 543           |
| DP202A | 2123MBT | ○                             | 220/240                    | 50/60         | 0.09/0.08                 | 16/15                           | 2400/2600      | 78/84                | 0.14/0.21                                     | 34/39          | 543           |
| DP203A | 2123LBL | ○                             | 220/240                    | 50/60         | 0.08/0.06                 | 10/10                           | 2150/2300      | 72/78                | 0.09/0.13                                     | 37/39          | 550           |
| DP203A | 2123LBT | ○                             | 220/240                    | 50/60         | 0.08/0.06                 | 10/10                           | 2150/2300      | 72/78                | 0.09/0.13                                     | 37/39          | 550           |

Frame : Aluminum alloy

Specifications subject to change without notice

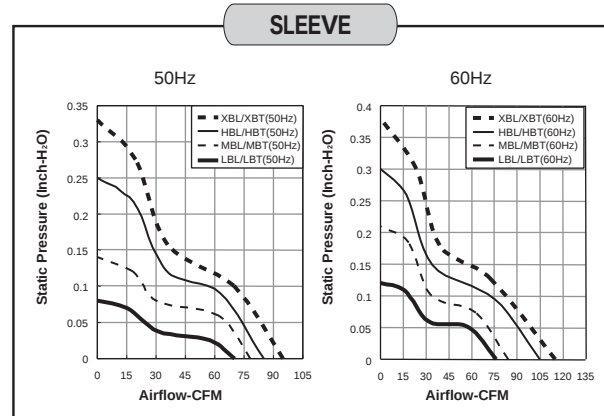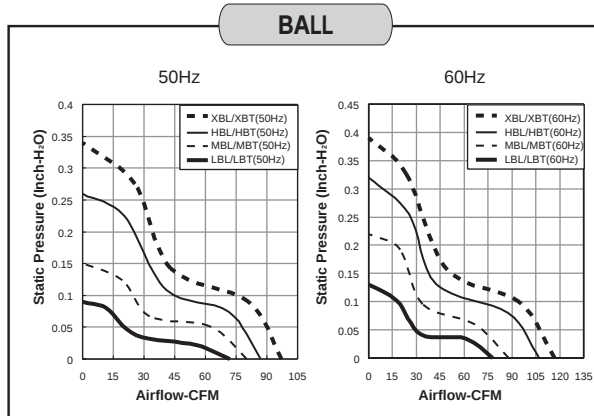

Sunon AC Series 09

Your Local Authorized Distributor:


Hardware Specialty Co., Inc.

[www.hardware-specialty.com](http://www.hardware-specialty.com)

# 120X120X38 mm (High Air Flow)

Bearing Type :Ball / Sleeve bearing

Air Flow:112-124CFM

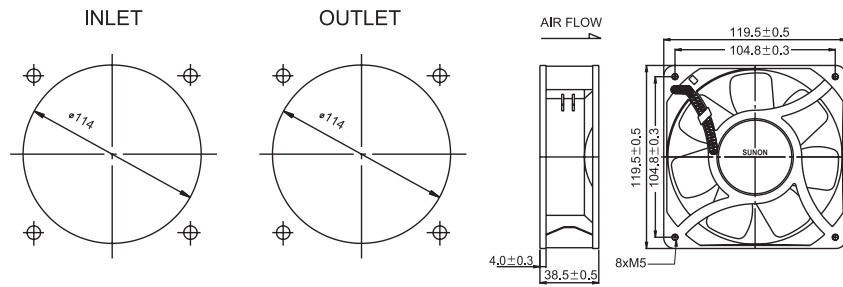


## AC Series

| Model     | P/N | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|-----------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| A1123-HSL |     | ⊙                             | 115                        | 50/60         | 0.28/0.25                 | 23/21                           | 2500/2750      | 112/124              | 0.31/0.33                                     | 43/46          | 536           |
| A1123-HST |     | ⊙                             | 115                        | 50/60         | 0.28/0.25                 | 23/21                           | 2500/2750      | 112/124              | 0.31/0.33                                     | 43/46          | 536           |
| A1123-HBL |     | ○                             | 115                        | 50/60         | 0.28/0.25                 | 23/21                           | 2500/2750      | 112/124              | 0.31/0.33                                     | 44/47          | 536           |
| A1123-HBT |     | ○                             | 115                        | 50/60         | 0.28/0.25                 | 23/21                           | 2500/2750      | 112/124              | 0.31/0.33                                     | 44/47          | 536           |
| A2123-HSL |     | ⊙                             | 230                        | 50/60         | 0.14/0.12                 | 24/22                           | 2500/2750      | 112/124              | 0.28/0.31                                     | 43/46          | 536           |
| A2123-HST |     | ⊙                             | 230                        | 50/60         | 0.14/0.12                 | 24/22                           | 2500/2750      | 112/124              | 0.28/0.31                                     | 43/46          | 536           |
| A2123-HBL |     | ○                             | 230                        | 50/60         | 0.14/0.12                 | 24/22                           | 2500/2750      | 112/124              | 0.28/0.31                                     | 44/47          | 536           |
| A2123-HBT |     | ○                             | 230                        | 50/60         | 0.14/0.12                 | 24/22                           | 2500/2750      | 112/124              | 0.28/0.31                                     | 44/47          | 536           |

Frame : Aluminum alloy

Specifications subject to change without notice

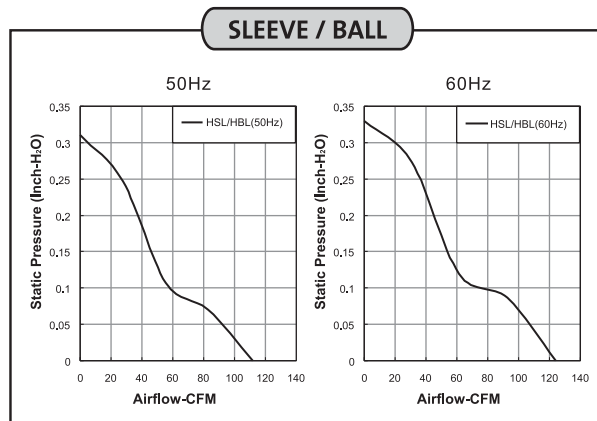

Sunon AC Series 10



Your Local Authorized Distributor:

Hardware Specialty Co., Inc.

[www.hardware specialty.com](http://www.hardware specialty.com)

# 120x120x38 mm

Bearing Type :Ball / Sleeve bearing  
Air Flow:85-100 CFM

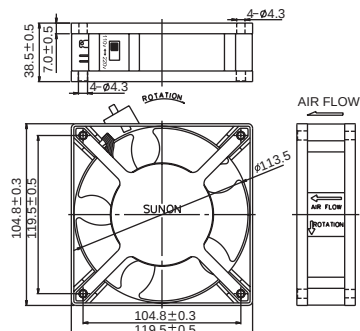
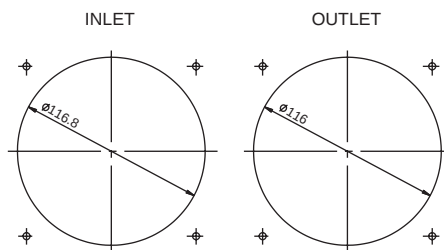


## AC Series

| Model           | P/N | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|-----------------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| SP109WR 1123HST |     | ⊙                             | 115                        | 50/60         | 0.25/0.22                 | 22/20                           | 2500/2900      | 85/100               | 0.28/0.35                                     | 41/47          | 465           |
| SP109WR 1123HSL |     | ⊙                             | 115                        | 50/60         | 0.25/0.22                 | 22/20                           | 2500/2900      | 85/100               | 0.28/0.35                                     | 41/47          | 465           |
| SP109WR 1123HBT |     | ○                             | 115                        | 50/60         | 0.25/0.22                 | 22/20                           | 2500/2900      | 85/100               | 0.25/0.30                                     | 42/48          | 465           |
| SP109WR 1123HBL |     | ○                             | 115                        | 50/60         | 0.25/0.22                 | 22/20                           | 2500/2900      | 85/100               | 0.25/0.30                                     | 42/48          | 465           |
| DP209WR 2123HST |     | ⊙                             | 220/240                    | 50/60         | 0.13/0.12                 | 22/21                           | 2500/2900      | 85/100               | 0.28/0.35                                     | 41/47          | 465           |
| DP209WR 2123HSL |     | ⊙                             | 220/240                    | 50/60         | 0.13/0.12                 | 22/21                           | 2500/2900      | 85/100               | 0.28/0.35                                     | 41/47          | 465           |
| DP209WR 2123HBT |     | ○                             | 220/240                    | 50/60         | 0.13/0.12                 | 22/21                           | 2500/2900      | 85/100               | 0.25/0.30                                     | 42/48          | 465           |
| DP209WR 2123HBL |     | ○                             | 220/240                    | 50/60         | 0.13/0.12                 | 22/21                           | 2500/2900      | 85/100               | 0.25/0.30                                     | 42/48          | 465           |

Frame : PBT plastic



Specifications subject to change without notice

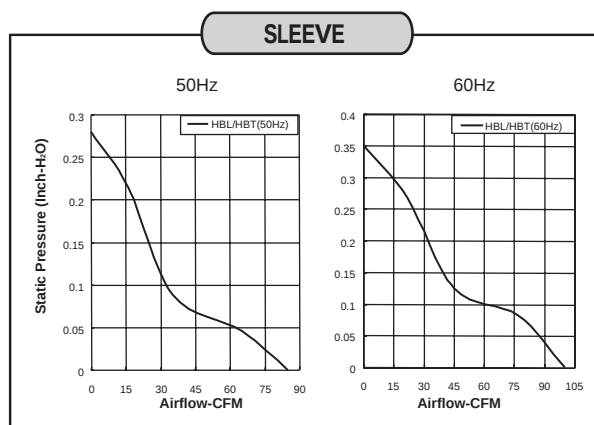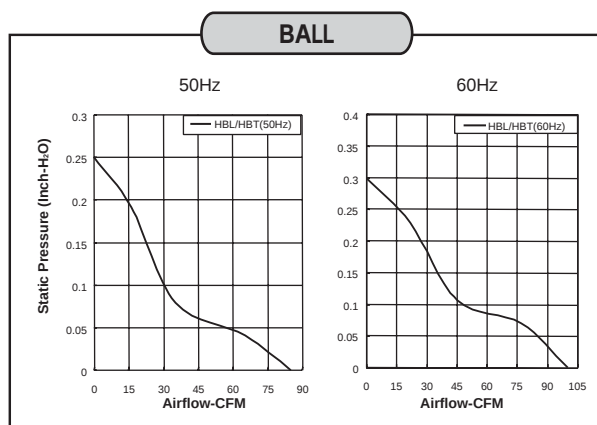

# 120x120x38 mm ( Dual AC voltage )

Bearing Type : Sleeve bearing

Air Flow:85-100 CFM

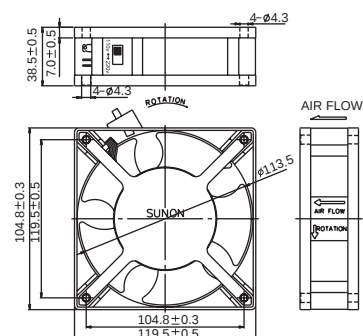
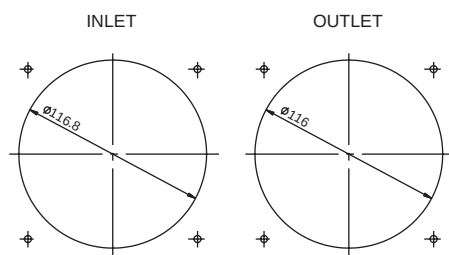


## AC Series

| Model   | P/N | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|---------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| SF309WR | ST  | ⊙                             | 115                        | 50/60         | 0.28/0.25                 | 24/22                           | 2500/2900      | 85/100               | 0.25/0.30                                     | 41/47          | 470           |
|         |     |                               | 230                        | 50/60         | 0.13/0.12                 | 23/22                           | 2500/2900      | 85/100               | 0.25/0.30                                     | 41/47          | 470           |
| SF309WR | SL  | ⊙                             | 115                        | 50/60         | 0.28/0.25                 | 24/22                           | 2500/2900      | 85/100               | 0.25/0.30                                     | 41/47          | 470           |
|         |     |                               | 230                        | 50/60         | 0.13/0.12                 | 23/22                           | 2500/2900      | 85/100               | 0.25/0.30                                     | 41/47          | 470           |

Frame : PBT plastic



Specifications subject to change without notice

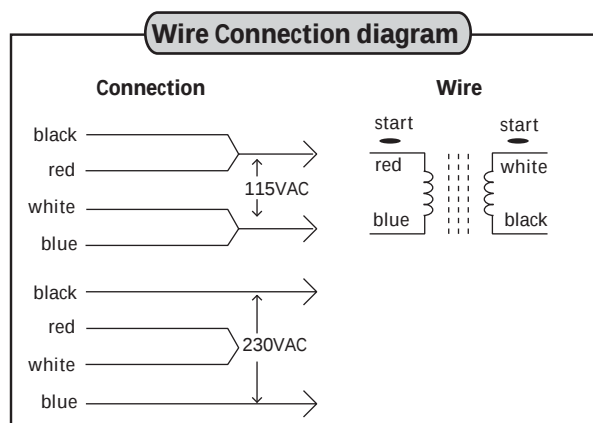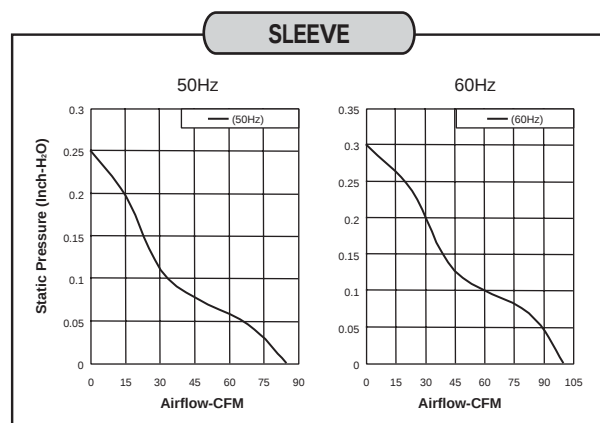

# 120x120x38 mm (Dual AC voltage)

Bearing Type : Ball / Sleeve bearing

Air Flow:95-115 CFM

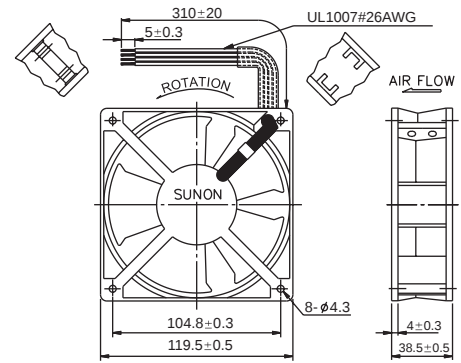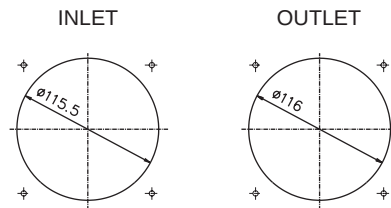


## AC Series

| Model    | P/N | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|----------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| SF1212AD | ST  | ⊙                             | 115                        | 50/60         | 0.27/0.24                 | 21.5/19                         | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |
|          |     |                               | 230                        | 50/60         | 0.13/0.12                 | 19.5/19                         | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |
| SF1212AD | SL  | ⊙                             | 115                        | 50/60         | 0.27/0.24                 | 21.5/19                         | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |
|          |     |                               | 230                        | 50/60         | 0.13/0.12                 | 19.5/19                         | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |
| SF1212AD | BT  | ○                             | 115                        | 50/60         | 0.27/0.24                 | 21.5/19                         | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |
|          |     |                               | 230                        | 50/60         | 0.13/0.12                 | 19.5/19                         | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |
| SF1212AD | BL  | ○                             | 115                        | 50/60         | 0.27/0.24                 | 21.5/19                         | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |
|          |     |                               | 230                        | 50/60         | 0.13/0.12                 | 19.5/19                         | 2700/3100      | 95/115               | 0.33/0.38                                     | 44/49          | 550           |


Frame : Aluminum alloy

Specifications subject to change without notice

### SLEEVE/BALL

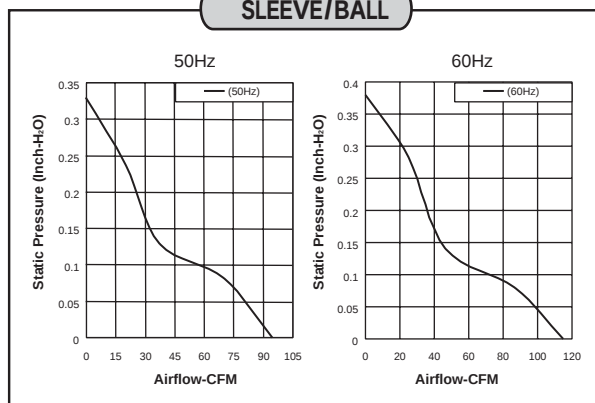


### Wire Connection diagram

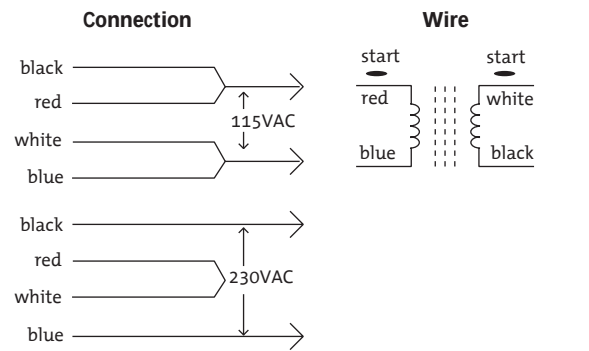

# 120x38 mm (Skeleton AC Fan)

Bearing Type :Ball / Sleeve bearing  
Air Flow:80-112 CFM


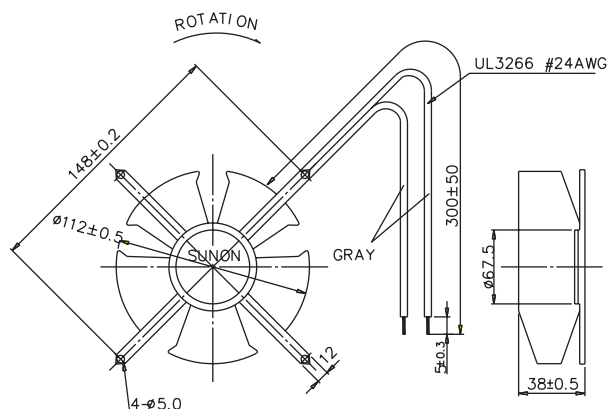


## AC Series

| Model            | P/N | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|------------------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| SP100-4F 1123XSL |     | ⊙                             | 115                        | 50/60         | 0.26/0.24                 | 22/20                           | 2600/3000      | 92/110               | 0.32/0.36                                     | 43/48          | 435           |
| SP100-4F 1123XBL |     | ○                             | 115                        | 50/60         | 0.26/0.24                 | 22/20                           | 2700/3100      | 94/112               | 0.33/0.37                                     | 44/49          | 435           |
| SP101-4F 1123HSL |     | ⊙                             | 115                        | 50/60         | 0.21/0.18                 | 14/13                           | 2300/2800      | 80/105               | 0.25/0.32                                     | 39/45          | 435           |
| SP101-4F 1123HBL |     | ○                             | 115                        | 50/60         | 0.21/0.18                 | 14/13                           | 2400/2900      | 82/107               | 0.26/0.33                                     | 40/46          | 435           |
| DP200-4F 2123XSL |     | ⊙                             | 220/240                    | 50/60         | 0.14/0.12                 | 22/21                           | 2600/3000      | 92/110               | 0.32/0.36                                     | 43/48          | 435           |
| DP200-4F 2123XBL |     | ○                             | 220/240                    | 50/60         | 0.14/0.12                 | 22/21                           | 2700/3100      | 94/112               | 0.33/0.37                                     | 44/49          | 435           |
| DP201-4F 2123HSL |     | ⊙                             | 220/240                    | 50/60         | 0.125/0.11                | 20/19                           | 2500/2800      | 82/107               | 0.26/0.33                                     | 39/45          | 435           |
| DP201-4F 2123HBL |     | ○                             | 220/240                    | 50/60         | 0.125/0.11                | 20/19                           | 2500/2800      | 82/107               | 0.26/0.33                                     | 40/46          | 435           |

Frame : Aluminum alloy

Specifications subject to change without notice

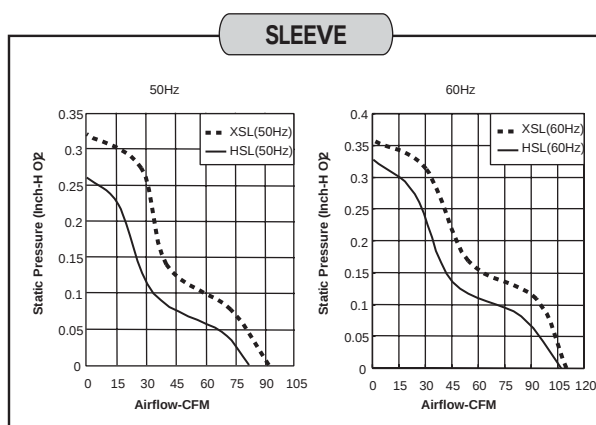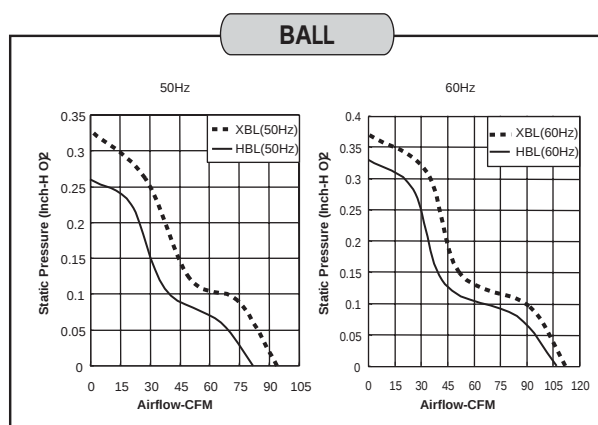



# 172x151x51 mm

Bearing Type :Ball bearing



Air Flow:178-239CFM



>> P/N:TC

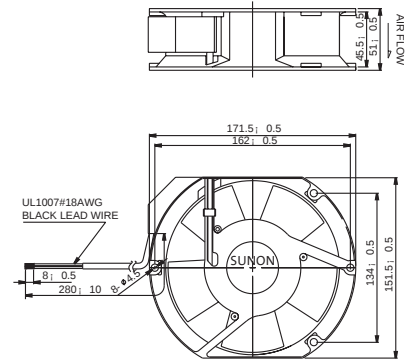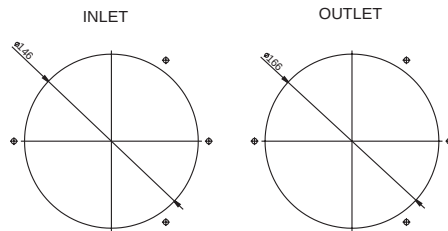

>> P/N: BLANK, P/N:T

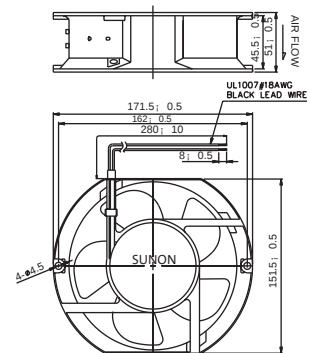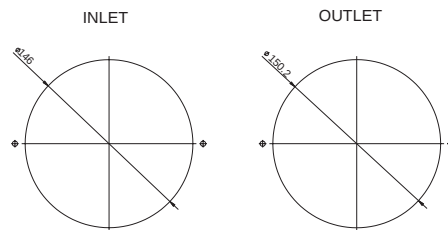


## AC Series

| Model     | P/N | Bearing<br>● SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|-----------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| A1175-HBL | TC  | ○                             | 115                        | 50/60         | 0.22/0.23                 | 25/27                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A1175-HBT | TC  | ○                             | 115                        | 50/60         | 0.22/0.23                 | 25/27                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A2175-HBL | TC  | ○                             | 230                        | 50/60         | 0.11/0.11                 | 25/26                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A2175-HBT | TC  | ○                             | 230                        | 50/60         | 0.11/0.11                 | 25/26                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A3175-HBL | TC  | ○                             | 380                        | 50/60         | 0.06/0.06                 | 20/20                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A3175-HBT | TC  | ○                             | 380                        | 50/60         | 0.06/0.06                 | 20/20                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A1175-HBL | T   | ○                             | 115                        | 50/60         | 0.65/0.54                 | 47/41                           | 2650/2950      | 180/200              | 0.48/0.48                                     | 52/55          | 942           |
| A1175-HBT | T   | ○                             | 115                        | 50/60         | 0.65/0.54                 | 47/41                           | 2650/2950      | 180/200              | 0.48/0.48                                     | 52/55          | 942           |
| A2175-HBL | T   | ○                             | 230                        | 50/60         | 0.25/0.22                 | 39/36                           | 2600/2800      | 178/192              | 0.38/0.44                                     | 52/54          | 942           |
| A2175-HBT | T   | ○                             | 230                        | 50/60         | 0.25/0.22                 | 39/36                           | 2600/2800      | 178/192              | 0.38/0.44                                     | 52/54          | 942           |
| A1175-HBL |     | ○                             | 115                        | 50/60         | 0.65/0.54                 | 47/41                           | 2650/2950      | 180/200              | 0.48/0.48                                     | 52/55          | 942           |
| A1175-HBT |     | ○                             | 115                        | 50/60         | 0.65/0.54                 | 47/41                           | 2650/2950      | 180/200              | 0.48/0.48                                     | 52/55          | 942           |
| A2175-HBL |     | ○                             | 230                        | 50/60         | 0.25/0.22                 | 39/36                           | 2600/2800      | 178/192              | 0.38/0.44                                     | 52/54          | 942           |
| A2175-HBT |     | ○                             | 230                        | 50/60         | 0.25/0.22                 | 39/36                           | 2600/2800      | 178/192              | 0.38/0.44                                     | 52/54          | 942           |

Frame : Aluminum alloy

Specifications subject to change without notice

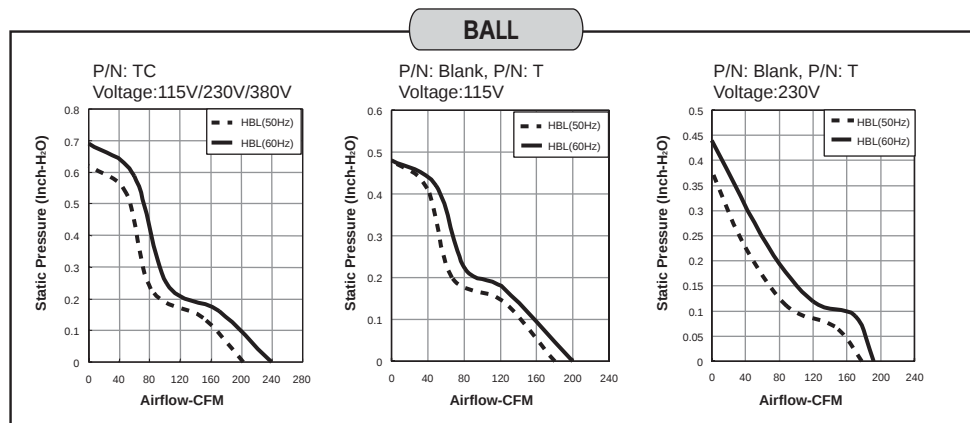

Sunon AC Series 15

Your Local Authorized Distributor:




Hardware Specialty Co., Inc.

[www.hardware-specialty.com](http://www.hardware-specialty.com)

# Ø 172x51 mm

Bearing Type :Ball bearing

Air Flow:203-239CFM

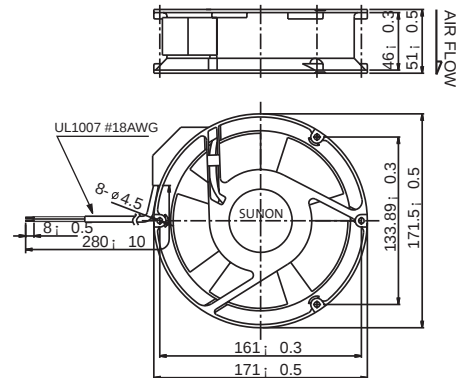


## AC Series

| Model     | P/N  | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|-----------|------|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| A1175-HBL | TC.R | ○                             | 115                        | 50/60         | 0.22/0.23                 | 25/27                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A1175-HBT | TC.R | ○                             | 115                        | 50/60         | 0.22/0.23                 | 25/27                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A2175-HBL | TC.R | ○                             | 230                        | 50/60         | 0.11/0.11                 | 25/26                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A2175-HBT | TC.R | ○                             | 230                        | 50/60         | 0.11/0.11                 | 25/26                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A3175-HBL | TC.R | ○                             | 380                        | 50/60         | 0.06/0.06                 | 20/20                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |
| A3175-HBT | TC.R | ○                             | 380                        | 50/60         | 0.06/0.06                 | 20/20                           | 2800/3200      | 203/239              | 0.62/0.69                                     | 51/58          | 908           |

Frame : Aluminum alloy

Specifications subject to change without notice

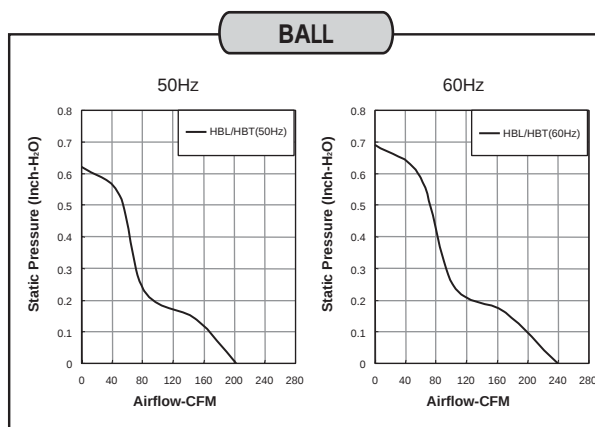

Sunon AC Series 16

Your Local Authorized Distributor:



Hardware Specialty Co., Inc.

[www.hardware specialty.com](http://www.hardware specialty.com)

# 176x176x89 mm

Bearing Type : Ball bearing

Air Flow:315-355 CFM

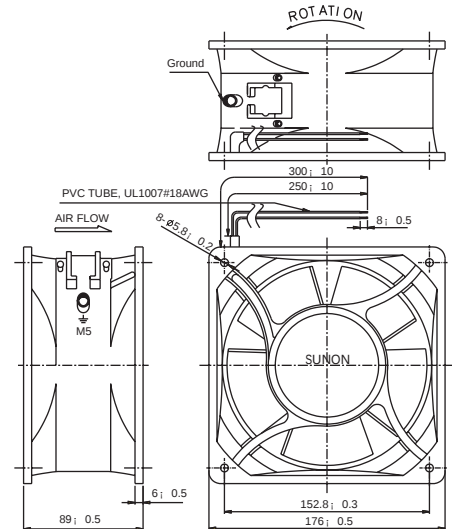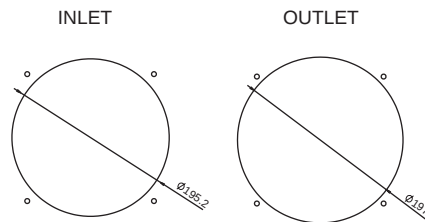


AC Series



| Model     | P/N | Bearing<br>● SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|-----------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| A1179-HBT | TC  | ○                             | 115                        | 50/60         | 0.25/0.27                 | 24/30                           | 2800/3250      | 315/355              | 0.65/0.8                                      | 62/66          | 1960          |
| A1179-HBL | TC  | ○                             | 115                        | 50/60         | 0.25/0.27                 | 24/30                           | 2800/3250      | 315/335              | 0.65/0.8                                      | 62/66          | 1960          |
| A2179-HBT | TC  | ○                             | 230                        | 50/60         | 0.11/0.15                 | 23/30                           | 2800/3250      | 315/335              | 0.65/0.8                                      | 62/66          | 1960          |
| A2179-HBL | TC  | ○                             | 230                        | 50/60         | 0.11/0.15                 | 23/30                           | 2800/3250      | 315/335              | 0.65/0.8                                      | 62/66          | 1960          |

Frame : Aluminum alloy

Specifications subject to change without notice

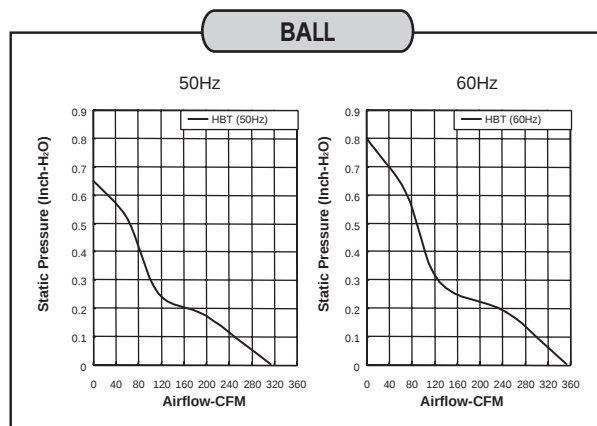

Sunon AC Series 17

Your Local Authorized Distributor:


Hardware Specialty Co., Inc.

[www.hardware-specialty.com](http://www.hardware-specialty.com)

# Ø 254x89 mm

Bearing Type :Ball bearing

Air Flow:600-850CFM

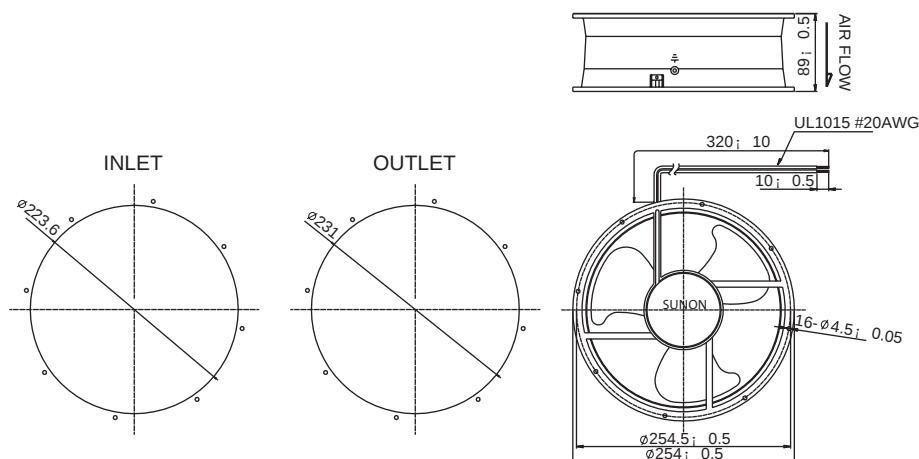


## AC Series

| Model     | P/N | Bearing<br>⊙ SLEEVE<br>○ BALL | Rating<br>Voltage<br>(VAC) | Freq.<br>(Hz) | Power<br>Current<br>(AMP) | Power<br>Consumption<br>(WATTS) | Speed<br>(RPM) | Air<br>Flow<br>(CFM) | Static<br>Pressure<br>(Inch-H <sub>2</sub> O) | Noise<br>(dBA) | Weight<br>(g) |
|-----------|-----|-------------------------------|----------------------------|---------------|---------------------------|---------------------------------|----------------|----------------------|-----------------------------------------------|----------------|---------------|
| A1259-MBL | TC  | ○                             | 115                        | 50/60         | 0.23/0.23                 | 26/23                           | 1400/1600      | 600/665              | 0.27/0.36                                     | 50/52          | 2000          |
| A1259-MBT | TC  | ○                             | 115                        | 50/60         | 0.23/0.23                 | 26/23                           | 1400/1600      | 600/665              | 0.27/0.36                                     | 50/52          | 2000          |
| A2259-HBL | TC  | ○                             | 230                        | 50/60         | 0.24/0.27                 | 56/60                           | 2100/1900      | 850/770              | 0.40/0.38                                     | 57/55          | 2000          |
| A2259-HBT | TC  | ○                             | 230                        | 50/60         | 0.24/0.27                 | 56/60                           | 2100/1900      | 850/770              | 0.40/0.38                                     | 57/55          | 2000          |
| A2259-MBL | TC  | ○                             | 230                        | 50/60         | 0.15/0.13                 | 30/30                           | 1400/1600      | 600/665              | 0.27/0.36                                     | 50/52          | 2000          |
| A2259-MBT | TC  | ○                             | 230                        | 50/60         | 0.15/0.13                 | 30/30                           | 1400/1600      | 600/665              | 0.27/0.36                                     | 50/52          | 2000          |

Frame : Aluminum alloy


Specifications subject to change without notice

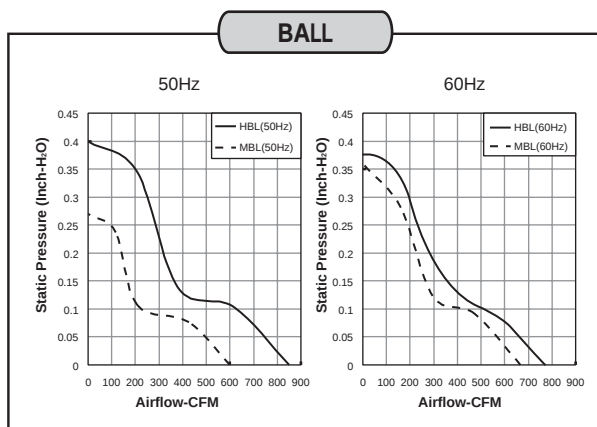


# ACCESSORIES

## METAL FINGER GUARD


FG-08 For 80mm Fan




FG-09 For 92mm Fan




FG-12 For 120mm Fan




FG-17 For 172mm Fan



FG-18 For 176mm Fan




FG-25 For 254mm Fan




## METAL FILTER GUARD


FM 06 For 60mm Fan




FM 08 For 80mm Fan



FM 09 For 92mm Fan




FM 12 For 120mm Fan




## PLASTIC GUARD


PB-06 For 60mm Fan




PB-08 For 80mm Fan




PB-09 For 92mm Fan




PB-12 For 120mm Fan




## PLASTIC FILTER GUARD

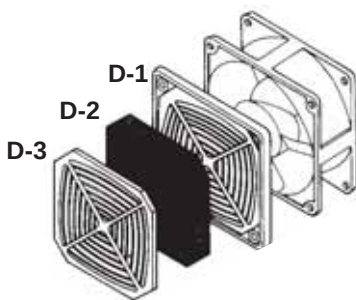


D-1 Finger Guard

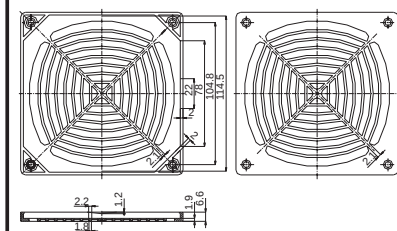

D-2 Filter



D-3 Remainder



Sunon AC Series 19

Your Local Authorized Distributor:


Hardware Specialty Co., Inc.

[www.hardware-specialty.com](http://www.hardware-specialty.com)





# ACCESSORIES

## AC CORD

### Power cord with straight connector



|       |               |
|-------|---------------|
| A2-03 | 300mm Length  |
| A2-06 | 600mm Length  |
| A2-10 | 1000mm Length |
| A2-20 | 2000mm Length |

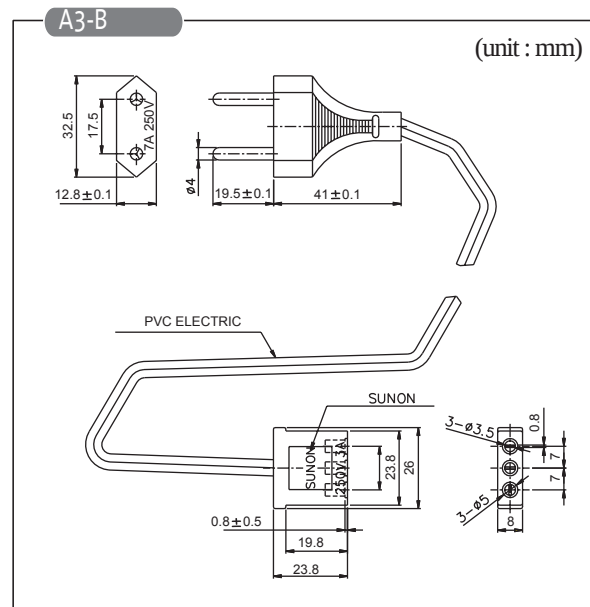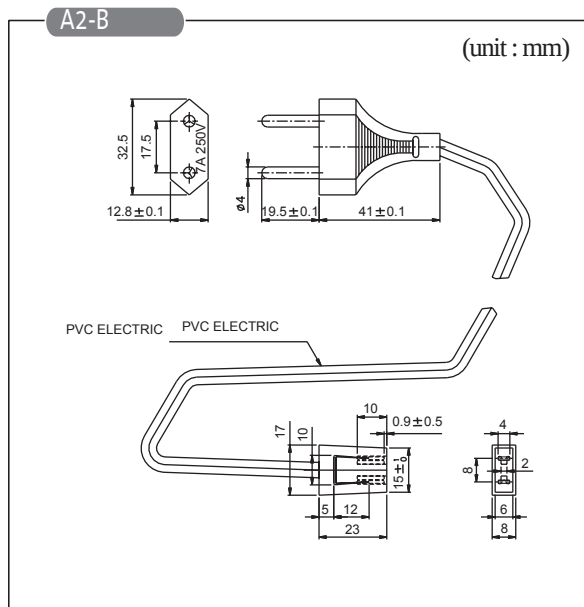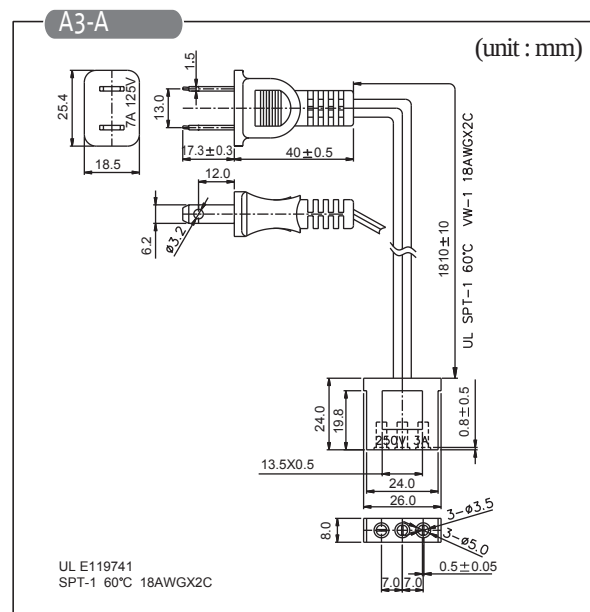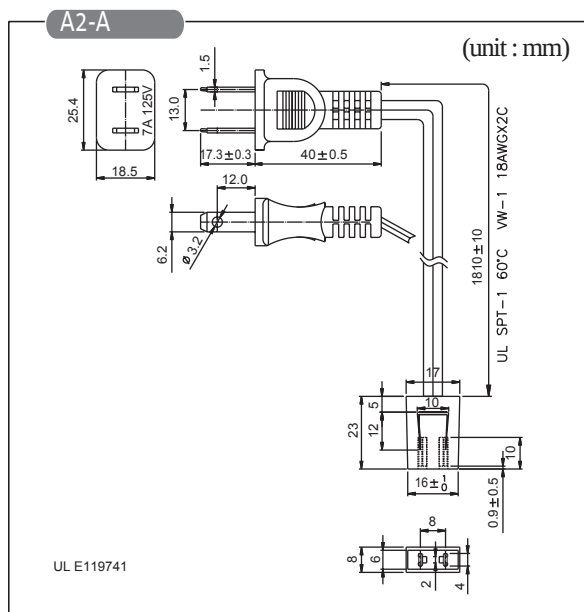

Sunon AC Series 20

Headquarters:

**Sunonwealth Electric Machine Industry Co., Ltd.**

12th floor, 120 Chung Cheng 1st Road, Kaohsiung, Taiwan

TEL: +886-7-7163069

FAX: +886-7-7163086

URL: <http://www.sunon.com>

E-mail: [sunon@email.sunon.com.tw](mailto:sunon@email.sunon.com.tw)

**Sunon Inc. (U.S.A.)**

1075 West Lambert Road Suite A, Brea, California 92821, U.S.A

TEL : +1-714-255-0208

FAX : + 1-714-255-0802

URL : <http://www.sunonusa.com>

E-mail : [info@sunon.com](mailto:info@sunon.com)

**Sunon SAS (Europe)**

Parc Medidis, 66, Ave Des Pepinieres 94832, Fresnes Cedex-France

TEL : +33-1-46154515

FAX : +33-1-46154510

URL: <http://www.sunoneurope.com>

E-mail : [info@sunoneurope.com](mailto:info@sunoneurope.com)

**Sunon Corporation (Japan)**

Stork Minami Otsuka 4Fl.33-1, 2 Chome,

Minami Otsuka Toshimaku, Tokyo, Japan 170-0005

TEL : +81-3-5395-3069

FAX: +81-3-5395-3080

URL: <http://www.sunon.co.jp>

E-mail : [info@sunon.co.jp](mailto:info@sunon.co.jp)

**Sunonwealth Electric Machine Industry (HK) Ltd. (Hong Kong)**

1906 Nan Fung Center, 264 Castle Peak Road, Tsuen Wan, Hong Kong

TEL : + 852-24-111-388

FAX : +852-24-050-707

E-mail : [info@sunon.com.hk](mailto:info@sunon.com.hk)

**Sunon Technologies Pte Ltd. (Singapore)**

10 Toh Guan Road, #03-08 TT International TradePark, Singapore 608838

TEL : +65-6795-0300

FAX : +65-6795-0600

E-mail : [info@sunon.com.sg](mailto:info@sunon.com.sg)

**Sunon Electronics (Kun Shan) Co.,Ltd. (Shanghai, China)**

TEL : +86-512-57700108

FAX : +86-512-57711575

URL: <http://www.sunon-ks.com.cn>

**Sunon China (Shen Zhen) Office (Shen Zhen, China)**

TEL : +86-755-26880688

FAX : +86-755-26880288

E-mail : [info@sunon.com.cn](mailto:info@sunon.com.cn)

